


think process!



ROTOTHERM[®] Green
drive through

ROTOTHERM® GREEN

drive through

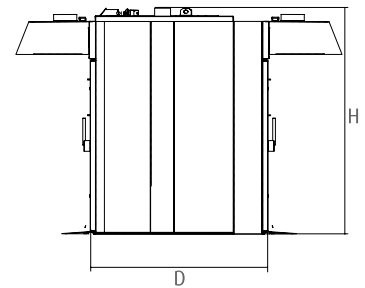

TECHNICAL DATA

		Standard version		High version	
		REC 1020 Green DT	REC 1280 Green DT	REC 1020 H Green DT	REC 1280 H Green DT
Dimensions (W x D x H)	mm	1.550 x 1.735 x 2.535	1.740 x 1.995 x 2.535	1.550 x 1.735 x 2.675	1.740 x 1.995 x 2.675
Required minimum ceiling height	mm	3.000		3.140	
ROTOTHERM Green oil/gas-heated					
Connected load rating (oil/natural gas/liquid gas)	KW	68	82	74	90
Electrical connected load ratings (control/motors/fans – no heating)		3,1 KW / 3,8 KVA		3,1 KW / 3,8 KVA	
ROTOTHERM Green electrically heated					
Electrical connected load rating	KW / KVA	60	75	60	75
Rotating table diameter	mm	1.100	1.300	1.100	1.300
for baking trays (e.g.)	mm	600 x 800	600 x 1.000	600 x 800	600 x 1.000
for baking trolley diagonal	mm	1.100	1.300	1.100	1.300
Max. baking area with 21 decks (see tray dimensions)	m ²	10,1	12,6	-	-
Max. baking area with 23 decks (see tray dimensions)	m ²	-	-	11	13,8
Max. rotating table load	kg	350	450	350	450
Max. baking trolley height	mm	1.810		1.950	
Oven weight	kg	2.100	2.500	2.200	2.600
Optional: Rotating table reinforcement, max. rotating table centric load	kg	450	550	450	550

WERNER & PFLEIDERER LEBENSMITTELTECHNIK GMBH

von-Raumer-Str. 8-18 // D-91550 Dinkelsbühl // Phone +49 9851-905-0 // Fax +49 9851-905-8342 // info@wp-l.de // www.wp-l.de // www.wpbakerygroup.com