

## Bowl tipper HK 200

**HK 200**  
Bowl tipper

1/2  
14.09.2009

### Device for lifting and tipping of wheel-out dough bowls

#### Characteristics:

The load-bearing construction, the transport mechanism and the drive of the lifting and tipping device "HK 200" are of extremely robust design. Power reserves ensure that the lifting process is always uniform and safe, irrespective of the bowl filling capacity.

- Tipping direction: left/right/left direct/right direct
- Lifting capacity: up to 1.000 kg
- Tipping height: approx. 1.800 mm

#### Advantages

**Very solid construction of all modules High Quality Made in Germany**

- High production and investment security

**Lifting capacity up to 1.000 kg**

**Space saving construction**


- Optimal use of production area

**Option of bowl scraping device**

- Maximal rationalisation effect

**Option of version with left and right tipping direction**

- High flexibility, due to optimal setting position

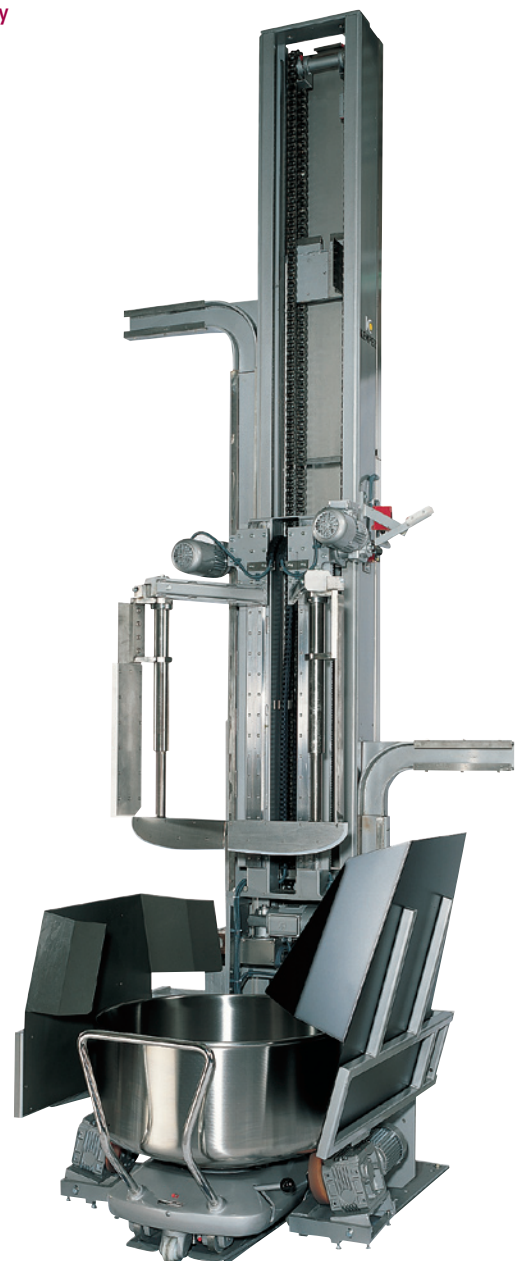

## Bowl tipper HK 200

**HK 200**  
Bowl tipper

2/2  
14.09.2009

### Specification

Standard Version:

#### HK 200

- Space-saving column design
- Including standard safety barrier (pipe frame)
- "Downwards" of the lifting platform, only with touched button "Down" possibly
- Stainless steel panelling

### Options

- Other tipping heights
- Dough slide
- Tipping height variable, manual
- Tipping height variable, motor-driven
- Dough scraping unit, also for left/right tipping
- Mounting for other manufacturers bowl models
- Protection fence with sliding door
- Lifting tubes

### Technical Data

#### Tipping direction

left/right/left direct/right direct

#### Lifting capacity

up to 1.000 kg

#### Tipping height

approx. 1.800 mm

#### Connection parameters

400 V; 1,1 kW; CEE 16A plug connector



® = registered trademark

All details non-binding. Subject to change in the course of technical progress. All rights reserved.